

GPU SuperServer SYS-421GE-TNRT



More details here

Key Applications

High Performance Computing, VDI, AI/Deep Learning Training, Media/Video Streaming, Cloud Gaming, Animation and Modeling, Design & Visualization, 3D Rendering, Diagnostic Imaging,


Key Features

- 32 DIMM slots Up to 8TB: 32x 256 GB DRAM Memory Type: 4800MHz ECC DDR5;
- 13 PCIe Gen 5.0 X16 FHFL Slots; AIOM/OCP 3.0 Support;
- 8x 2.5" Hot-swap SATA drive bays; 8x 2.5" Hot-swap NVMe drive bays; 8x HOT SWAP 2.5" SATA/SAS (AOC required);
- 8 Hot-Swap Heavy Duty Fans with Optimal Fan Speed Control;
- 4x 2700W (2+2) Redundant Power Supplies, Titanium Level;




Form Factor	4U Rackmount Enclosure: 437 x 178 x 737mm (17.2" x 7" x 29") Package: (27" x 26.57" x 41")
Processor	Dual Socket E (LGA-4677) 4th Gen Intel® Xeon® Scalable processors Supports up to 350W TDP CPUs (Air Cooled) Supports up to 350W TDP CPUs (Liquid Cooled)
GPU	Supported GPU: GPU-NVH100-80, GPU-NVA100-80-NC CPU-GPU Interconnect: PCIe 5.0 x16 Switch Dual-Root GPU-GPU Interconnect: NVIDIA® NVLink™ Bridge (optional)
System Memory	Memory Capacity: 32 DIMM slots Up to 8TB: 32x 256 GB DRAM Memory Type: 4800MHz ECC DDR5 DRAM
Drive Bays	24x 2.5" hot-swap NVMe/SATA/SAS drive bays (8x 2.5" NVMe hybrid; 8x 2.5" NVMe dedicated) 2 M.2 NVMe
Expansion Slots	12 PCIe 5.0 x16 LP slot(s) 1 PCIe 5.0 X16 slot(s)
On-Board Devices	Chipset: Intel® C741 Network Connectivity: 2x 10GbE BaseT with Intel® X710-AT2 IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	Video: 1 VGA port(s)

(Front View – System)

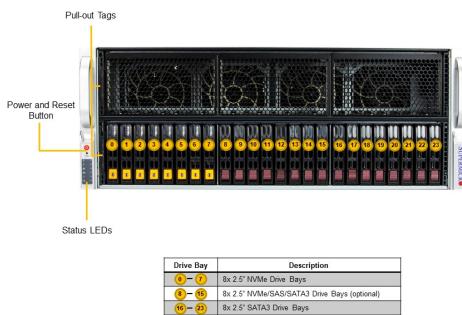

(Rear View – System)

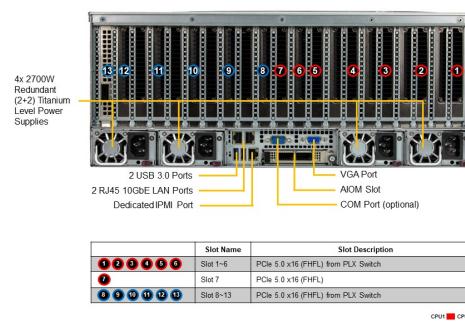**System Cooling**

8 heavy duty fan(s)
Liquid Cooling: Direct to Chip (D2C) Cold Plate (optional)

Power Supply

2700W Redundant Titanium Level power supplies

System BIOS

BIOS Type: AMI 32MB SPI Flash EEPROM

Management

Redfish API; Supermicro Server Manager (SSM); Supermicro Power Manager (SPM); Supermicro Update Manager (SUM); SuperDoctor® 5; Super Diagnostics Offline ; KVM with dedicated LAN ; IPMI 2.0

PC Health Monitoring

CPU: Monitors for CPU Cores, Chipset Voltages, Memory
8+4 Phase-switching voltage regulator
FAN: Fans with tachometer monitoring
Status monitor for speed control
Pulse Width Modulated (PWM) fan connectors
Temperature: Monitoring for CPU and chassis environment
Thermal Control for fan connectors

Dimensions and Weight

Height: 7" (178 mm)
Width: 17.2" (437 mm)
Depth: 29" (737 mm)
Gross Weight: 100 lbs (45.3 kg)
Net Weight: 65.5 lbs (29.7 kg)
Packaging: 26.57" x 27" x 41"
Available Color: Black Front & Silver Body

Operating Environment

Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F)
Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)
Operating Relative Humidity: 8% to 90% (non-condensing)
Non-operating Relative Humidity: 5% to 95% (non-condensing)

Motherboard

[Super X13DEG-OA](#)

Chassis

CSE-418G2TS-R5K40P